

Fuel and Lubes Antioxidants

Antioxidants improve the resistance to oxidation of transportation and industrial lubricants

Aminic and phenolic antioxidants retard oxidation in the oil by reacting with and stabilizing radicals produced in the lubricant. Phosphite and Thioester antioxidants decompose hydroperoxides.

In engine oils, antioxidants enable drain intervals to be extended. They preserve the integrity of the oil for longer periods, helping to maintain viscosity, reducing deposit and sludge formation, and guarding against the production of corrosion species, whilst protecting oil at higher temperatures.

A comprehensive range of products that enhance the performance and prolong the life of engines and machinery

With more than 50 years' experience in stabilization, SONGWON offers an extensive portfolio of fuel and lubricant additives for automotive, industrial applications and biofuels including aminic, phenolic, phosphite and thioester antioxidants. Close cooperation with customers allows the development of solutions for today and tomorrow, and the range is constantly being expanded to meet market needs.

By improving the performance of lubricants and fuels to ensure that they last longer and help to protect engines and equipment, SONGWON antioxidants also make an important contribution to environmental sustainability.

SONGWON manufactures fuel and lubricant antioxidants at its plant in South Korea, in which it invests continuously in anticipation of new industry requirements. Backward integration of key raw materials and economies of scale help to guarantee availability and reliable supply.



Product range selection guide





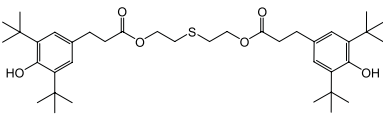





type of Antioxidants			Automotive				Industrial				Speciality & fuels		
			Gasoline engine oils	Diesel engine oils	ATF	Gear & axle oils	Compressor oils	Hydraulic oils	Metalworking fluids	Turbine oils	Greases	Synthetic base oils	Vegetable Fuels
Aminic, Phenolic, Phosphite and Thioester Antioxidants	Aminic	SONGNOX® L570	■	■	■	■	■	■	■	■	■	■	■
		SONGNOX® L670	■	■	■	■	■	■	■	■	■	■	■
	Phenolic	SONGNOX® L101				■			■			■	
		SONGNOX® L107	■	■				■		■		■	
		SONGNOX® L115	■	■						■		■	
		SONGNOX® L135	■	■	■	■	■		■	■	■	■	
		SONGNOX® 2,6-DTBP			■	■	■	■	■	■	■	■	■
	Phosphite	SONGNOX® L416			■	■	■	■	■	■			
	Thioester	SONGNOX® L224				■	■	■	■	■			
		SONGNOX® L226				■	■	■	■	■			

■ Recommended
□ Suitable

		TGA in air		Solubility* (wt.%) at 20°C					
type of Antioxidants		% mass loss	°C	Group I	Group II	Group III	Group IV (PAO)	Ester	Water
SONGNOX® L570	Aminic	5%	233	> 10.0	> 10.0	> 10.0	> 10.0	> 10.0	< 0.01
		25%	282						
		50%	308						
SONGNOX® L670	Aminic	5%	250	> 10.0	> 10.0	> 10.0	> 10.0	> 10.0	< 0.01
		25%	299						
		50%	329						
SONGNOX® L101	Phenolic	5%	328	< 0.3	< 0.2	< 0.2	< 0.1	> 2.0	< 0.01
		25%	365						
		50%	392						
SONGNOX® L107		5%	297						
		25%	332						
		50%	349						
SONGNOX® L115	Phenolic	5%	307	< 1.0	< 1.0	< 1.0	< 1.0	> 5.0	< 0.01
		25%	341						
		50%	356						
SONGNOX® L135	Phenolic	5%	244	> 10.0	> 10.0	> 10.0	> 10.0	> 10.0	< 0.01
		25%	291						
		50%	315						
SONGNOX® 2,6-DTBP	Phenolic	5%	95	> 5.0	> 5.0	> 5.0	> 5.0	> 10.0	< 0.01
		25%	144						
		50%	167						
SONGNOX® L416	Phosphite	5%	234	> 1.0	< 0.8	< 0.8	< 0.8	> 1.0	< 0.01
		25%	269						
		50%	291						
SONGNOX® L224	Thioester	5%	262	> 2.0	> 2.0	> 2.0	> 2.0	> 5.0	< 0.01
		25%	292						
		50%	311						
SONGNOX® L226	Thioester	5%	282	> 5.0	> 5.0	> 5.0	> 5.0	> 5.0	< 0.01
		25%	327						
		50%	348						

* Test oils are of ISO 32 viscosity grade or similar

Aminic, Phenolic, Phosphite and Thioester Antioxidants

		Molecular Weight	Melting Range (°C)
SONGNOX® L570 Mixture of butylated & octylated diphenylamine CAS No: 68411-46-1 LQ		butyl, octyl diphenylamine antioxidant	—
SONGNOX® L670 Bis(nonylphenyl)amine CAS No: 36878-20-3 LQ		nonyl diphenylamine antioxidant	—
SONGNOX® L101 Tetrakis[methylene-3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionate]methane CAS No: 6683-19-8 PW		1178	110.0 ~ 125.0
SONGNOX® L107 Octadecyl-3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionate CAS No: 2082-79-3 CP		531	50.0 ~ 55.0
SONGNOX® L115 Thiodiethylenebis[3-(3,5-ditert-butyl-4-hydroxyphenyl)propionate] CAS No: 41484-35-9 PW		643	> 65.0
SONGNOX® L135 Benzenepropanoic acid, 3,5-bis(1,1-dimethyl-ethyl)-4-hydroxy-, C7-9-branched alkyl esters CAS No: 125643-61-0 LQ		390	—
SONGNOX® 2,6-DTBP 2,6-di-tert-butylphenol CAS No: 128-39-2 SL		206	> 34.0
SONGNOX® L416 Tris(2,4-di-tert-butylphenyl) phosphite CAS No: 31570-04-4 PW, FF		647	181.0 ~ 187.0
SONGNOX® L224 Dilauryl thiodipropionate CAS No: 123-28-4 PW, SB, LQ		515	38.0 ~ 41.0
SONGNOX® L226 Ditridecyl thiodipropionate CAS No: 10595-72-9 LQ		543	—

Viscosity at 40°C Kinematic (mm²/s)	Density at 20°C (g/cm³)	Element Content (%)			NSF / FDA¹	LuSc List²	REACH	Kosher	Halal
		S	P	N					
400	0.98	–	–	4.8	0.5 wt. %	Yes	Yes	Yes	Yes
600	0.95	–	–	3.5	–	Yes	Yes	–	–
Solid	Solid	–	–	–	0.5 wt. %	–	Yes	Yes	Yes
Solid	Solid	–	–	–	–	Yes	Yes	Yes	Yes
Solid	Solid	5.0	–	–	0.5 wt. %	Yes	Yes	Yes	Yes
125	0.97	–	–	–	–	Yes	Yes	Yes	Yes
Solid	Solid	–	–	–	–	–	Yes	–	–
Solid	Solid	–	4.8	–	0.5 wt. %	–	Yes	Yes	Yes
Solid	Solid	6.2	–	–	–	–	Yes	–	–
27	0.94	5.9	–	–	–	–	Yes	–	–

1. Approved by NSF / FDA for use in blending food grade lubricants with incidental food contact, at a maximum level as specified.
2. Meet the European Ecolabel criteria for lubricants and is featured on the Lubricant Substance Classification List (LuSc-list).

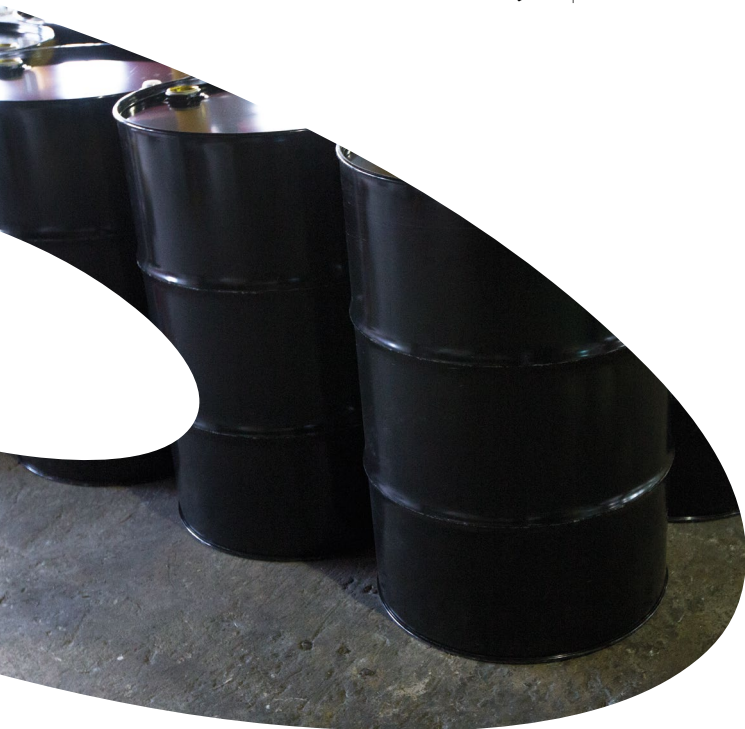
Standard Packaging

- **Antioxidants, Solids:** 20 kg PE Bag
- **Antioxidants, Liquids:** 185 kg Steel Drum
190 kg Steel Drum
900 kg IBC
20 MT ISO Tank

Standard pallet size is CP1 and CP3.

Key to Abbreviations of Physical Forms

- | | | | |
|------------------------|-------------------------------|---------------------------------|-----------------------------|
| • PW: Powder | • DW: Dispersion | • BD: Beads | • GR: Granule |
| • SB: Semi Bead | • MB: Micro Beads | • DF: Dust Free Flow | • FG: Fine Grind |
| • SL: Solid | • FC: Fusion Crystal | • CP: Crystalline Powder | • VL: Viscous Liquid |
| • FF: Free Flow | • LQ: Liquid or Molten | • PS: Pastilles | |



Transport and Storage

As a general guideline, we recommend storing the products mentioned in this brochure in their original sealed containers in a cold and dry place. For more detailed information on a specific product, please refer to the corresponding **Technical Data Sheet**.

By law, a number of chemical products must be labeled in respect of transport, storage and handling. Thus corresponding care is a prerequisite for their appropriate handling. Furthermore, local legal regulations may apply.

Detailed information is given in the respective **Safety Data Sheets**.

About SONGWON Industrial Group

A leader in the development, production and supply of specialty chemicals, SONGWON's products touch your life every day, everywhere. Since 1965, we've been driving innovation, partnering for progress and paving the way for a better more sustainable tomorrow with 360° customized solutions.

Headquartered in South Korea, SONGWON is the 2nd largest manufacturer of polymer stabilizers worldwide. With Group companies and world-class manufacturing facilities across the globe, we are dedicated to providing customers in over 60 countries with high-performance products that meet their individual needs and the best levels of service.

For further information, please go to:

www.songwon.com





Check out our
official website



Check out our
WeChat account

For further information, please go to:

www.songwon.com

lubricantadditives@songwon.com

SONGWON provides customers with warranties and representations as to the chemical or technical specifications, compositions and/or the suitability for use for any particular purpose exclusively in individual written agreements.

The facts and figures contained herein have been carefully compiled to the best of SONGWON's knowledge but are essentially intended for informational purposes only.

SONGWON Industrial Group does not accept any liability whatsoever for any information, reference or advice provided in this document or any similar SONGWON publication.

Version 6, January 2020 (Fuel and Lubricant Additives)